

OPERATOR FOR SWING GATES

G-Bat



TOP RANKING FOR INNOVATION.

Enters G-Bat, the brand new version of Euro Bat: state-of-the-art technology, top performance, safe efficiency. For G-Bat we selected only the best: this is the guarantee of a long-running success propelled towards absolute perfection.

WINNING RELIABILITY.

- The sturdy inner kinematic mechanism which comprises a bronze crown/steel worm screw, guarantees long life and, therefore, a high number of manoeuvres/openings/cycles.
- Protection class IP54.

ITS STRENGTH LIES IN ITS SIMPLICITY.


- Available both with right- and left-hand opening; this allows an installation as close to the hinge as possible without the need of building work.

- The axial thrust develops great power and allows the doors of up to four metres to be moved.
- The automatism release is easy to find and activate.

TOP VERSATILITY


- This product is suitable for various uses: traditional 230V/115V, intensive 24V, residential 24V ENV with virtual encoder.
- The 24V versions can be equipped with a buffer battery (optional) which allows the gate to be opened even when there is no tension available.

DIMENSIONS

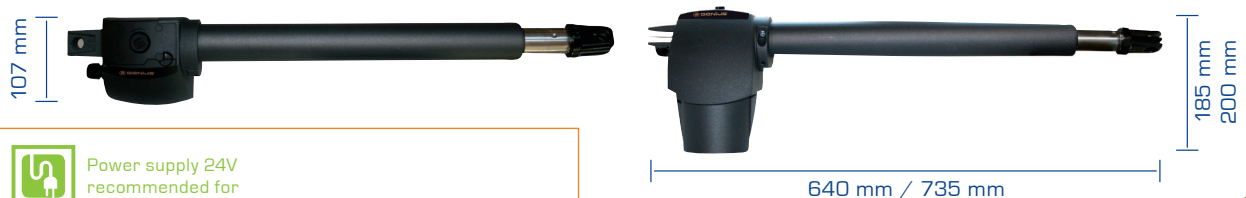

Power supply 24V recommended for an intensive use.

Model	Version	Pcs./Pallet	Code	€
G-BAT 324 DX	Non-reversible right, 24Vdc power supply	-	6170034	
G-BAT 324 SX	Non-reversible left, 24Vdc power supply	-	6170035	
G-BAT 424 DX	Non-reversible right, 24Vdc power supply	-	6170036	
G-BAT 424 SX	Non-reversible left, 24Vdc power supply	-	6170037	
G-BAT 300 DX	Non-reversible right	-	6170026	
G-BAT 300 SX	Non-reversible left	-	6170027	
G-BAT 300 DX	Non-reversible right slow	-	6170028	
G-BAT 300 SX	Non-reversible left slow	-	6170029	
G-BAT 400 DX	Non-reversible right	-	6170030	
G-BAT 400 SX	Non-reversible left	-	6170031	
G-BAT 400 DX	Non-reversible right slow	-	6170032	
253,10G-BAT 400 SX	Non-reversible left slow	-	6170033	

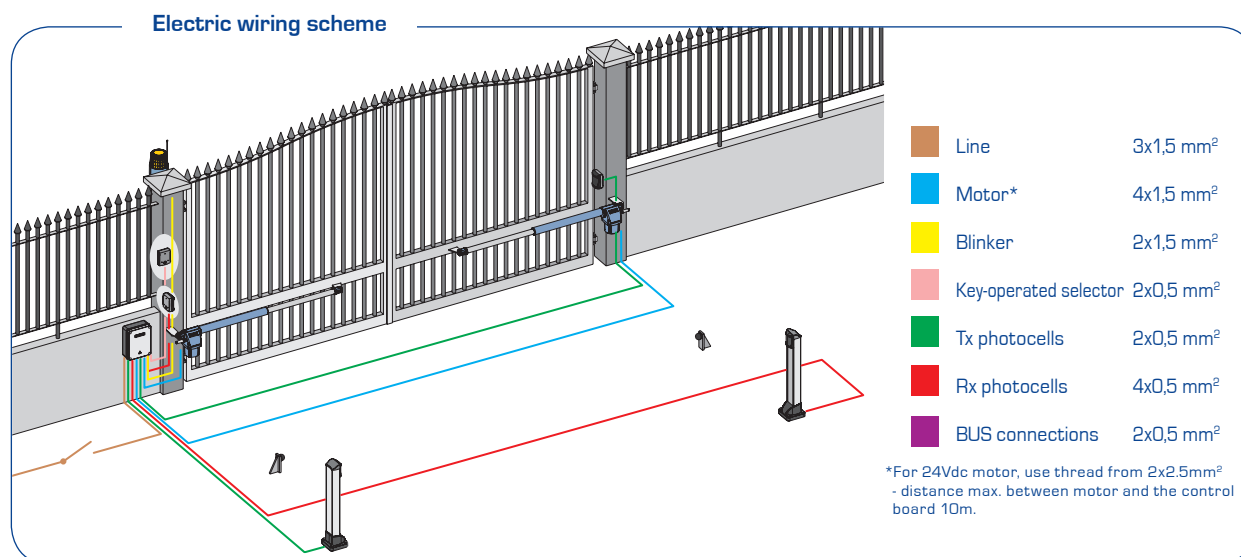


ACCESSORIES

CONTROL BOARDS



BRAIN 574 (Page 113)
BRAIN 592 (Page 113)
BRAIN 03 (Page 117)
BRAIN 15 (Page 117)



PLATE

KIT of 6 tixing plates to screw with a slot, for welding a standard bracket.

CODE
58P0199



BRACKET

KIT of 6 front brackets to screw h. 77 mm.

CODE
58P0511



BRACKET

Kit of 6 back brackets h. 160 mm.

CODE
6100253



BRACKET

Kit of 6 back brackets to screw h. 130 mm.

CODE
6100043



COVERING CARTER

Kit n. 2 covering carter stem only for G-Bat 300 both right and left.

CODE
6100254

Technical specifications	300	400	300 LENTO	400 LENTO	324	424
Power supply (Vac)			230		24	
Power (W)			280		70	
Current (A)			1.2		3	
Heat protection (°C)			140		-	
Capacitor (µF)			8		-	
Thrust (daN)		350		300		300
Travel (mm)	300	400	300	400	300	400
Speed (cm/sec)		1.6		1.1		1.6
Max. leaf length (m) ⁽¹⁾	3	4	3	4	3	4
Type and frequency of use at 20 °C			S3 - 30%			100%
Indicative hour cycles at 20°C	≥30	≥24	≥20	≥16	≥100	≥75
Operating ambient temperature			20°C +55°C			-20°C +55°C
Operator weight (Kg)	6.5	7	6.5	7	6.5	7
Protection class			IP54			IP54

(1) Over 2,50 m, an electric lock is essential to ensure leaf blocking.

DEVICES



Obstacle
detections (page 122)



Safety
(page 124)



Radio controls
(page 126)



Control
(page 128)

GENIUS 57